

ICS-6 Interlock Accessories

ICS-6

Laser Interlock Control Panel
10.4 w x 9.0 h x 3.4 d inches



ICS-5-BB

Deep box base for ICS-5
Dimensions when fitted to ICS-5:
10.4 w x 9.0 h x 5.7 d (inches)



ICS-1-DB-1/1

Interlock distribution box with 1 male XLR socket for connection to laser interlock connector on back of laser and 1 female XLR sockets for connection to laser beam shutters



2.6 w x 4.1 h x 2.1 d (inches)

ICS-1-DB-2/1

Interlock distribution box with 2 male XLR socket for connection to laser interlock connector on back of laser and 1 female XLR sockets for connection to laser beam shutters

2.6w x 2.3 h x 2.1 d (inches)



ESTOP-PB

Emergency stop push button (trips out interlock panel thereby disabling all laser emissions and releasing maglock)

2.5 w x 2.5 h x 2.2 d (inches)



ESTOP-BG

Emergency door release break glass (releases maglock)

3.3 w x 3.3 h x 2.3 d (inches)



PUSH-BUT

Exit pushbutton triggers override and releases maglock on door when pressed

2.6 w x 2.6 h x 2.1 d (inches)



LEDS-L-2W

3 state Mini LED Sign (both red and green messages display on one sign).

6.3 w x 4.3 h x 1.5 d (inches)

Voltage: 24 VDC



ICS-KP-12

Access Keypad with Override



LS-10-12 Laser beam shutter, 20 W max average laser power
0.6 inch diameter aperture
3.9 w x 2.5 h x 1.5* d (inches)
*4 inches including tube



PS-12V-1A 12 Volt, 1A power supply
Can be placed inside ICS-5 or can be wall mounted
3.7 w x 1.8 h x 1 d (inches)



MAGLOCK Low voltage maglock (one per door leaf)
10 w x 1.7 h x 1 d (inches)



LEAD-LS-3M Lead to connect shutter to distribution box
9.8 feet (3 meters)



LEAD-IC-OE-3M Lead to connect laser interlock connector to distribution box
9.8 feet (3 meters)



IS-MDC-12 Dual channel coded magnetic door safety contact
2.6 x 1.2 x 0.5 d (inches)



O-PCB

Override Board for ICS

4.5 l x 2 w inches



ICS-OR-PB


Interlock override push
button switch

3.5 l x 3.25 w x 3 d inches




SOC-US-2G-SM

US Style, surface mount, 2G
mains socket, 16A

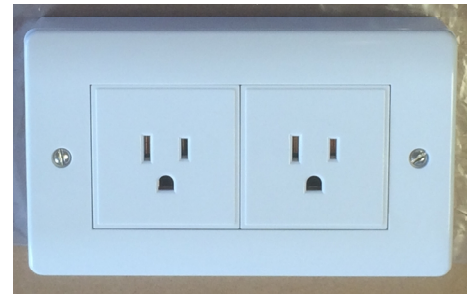

ICS-5-IB-9

9 way interlock board, sup-
plied pre-fitted inside ICS-5
9.1 w x 3.1 h x 1.4d (inches)



RT Technologies Inc.
2391 Briarleigh Way
Dunwoody, GA 30338

Telephone: 770-332-0092
Fax: 770-332-0092
Email: contact@rtlasersafety.com
Web: www.rtlasersafety.com

RT Technologies
World Class Laser Safety